




3CR SERIES | MOTOR STARTING RELAYS

CURRENT TYPE GRAVITY DEPENDENT

Introduction

The Klixon® 3CR series current type motor starting relay is designed for single-phase AC applications with motor start winding currents up to 15 Amps. It is applicable on both split phase and capacitor start motors.

The 3CR relay can be mounted directly on the motor housing or at a convenient location away from the motor. Since the 3CR eliminates the space-consuming centrifugal switch, motor size and weight are reduced.



Bracket Mounted Type 100 Series



2-Pin Plug-on 200 Series



3-Pin Plug-on 300 Series

Applications

Typical applications of the 3CR are oil burner motors, refrigerator and freezer compressors, dishwasher motors, and other appliance motors.

Termination

The bracket mounted type is supplied with either male quick-connects or 6-32NC screw terminals for start, main, and line connections.

The 2-pin plug-on type is supplied with a male quick connect or 6-32NC screw terminals for line connection.

All 100 and 200 series can be supplied with various combinations of screw and quick-connect terminals, leads with or without terminals, and dummy terminals at slight additional cost.

The 3-pin plug-on type has male quick-connects or 6-32NC screw terminals included for the two line connections to the relay.

Product Points


- Complete mounting flexibility — plug-on types fit all compressor pin orientations; bracket mounted type for convenient mounting in conventional motor applications
- Small size for compact installations
- Range of contact ratings — up to 15 amp start winding current
- Long contact life — designed for more than 1,500,000 cycles at 10amps, 600,000 cycles at 15 amps
- Wide range of stable pick-up and drop-out ratings
- Rugged all-welded construction, plated external metal parts, and dust-tight phenolic case

Construction Points

The 3CR relay utilizes a steel armature centered in a solenoid coil field and bridging-type contact arm which closes by armature movement. All working parts are enclosed in a rugged case and air core construction is used to avoid residual magnetism. A double pair of contacts give two breaks in series to assure longer contact and relay life.

The 3CR relay is normal open with its coil connected in series with the main winding of the motor and its starting circuit in series with the start winding. When voltage is applied to the motor, the high current through the main winding and relay coil creates a magnetic field which lifts or "picks up" the relay armature and closes the start contacts.

Increasing motor speed and related decreasing current through the main winding and relay coil reduce the magnetic force and the armature "drops out" to open the start contacts and disconnect the start winding.

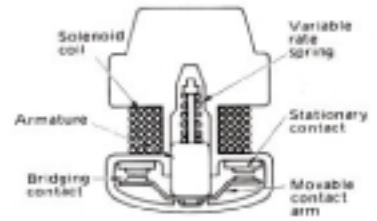

DIMENSIONS AND CONFIGURATIONS

All dimensions are in millimeters [Inch].

<p>250 x .033 (6.35 x .838) STRAIGHT MALE QUICK CONNECT TERMINAL</p> <p>1.211 (30.759)</p> <p>.178 (4.521) DIA 2-MTG HOLES</p> <p>1.310 (33.274)</p> <p>1.441 (36.601)</p> <p>.375 (9.525)</p> <p>1.000 (25.4)</p> <p>.048 (1.219)</p> <p>1.437 (36.499)</p>	<h3>Bracket Mounted 100 Series</h3> <p>4 terminal, two circuit configuration also available.</p>
<p>1.342 (34.086)</p> <p>.362 (9.194) MIN PIN INSERTION</p> <p>#6-32NC-2 THREAD</p> <p>.266 (6.756)</p> <p>.950 (24.13)</p> <p>.620 (15.748)</p> <p>1.019 (25.8821)</p> <p>.457 (11.607)</p> <p>1.310 (33.274)</p> <p>1.597 (40.563)</p> <p>PIN CONNECTORS TO MATE WITH .089-.091 (2.260-2.311) PLACED .459 (11.658) APART ON CENTER</p>	<h3>2 Pin Plug-on 200 Series</h3>
<p>.188 x .032 (4.775 x .813) MALE QUICK CONNECT TERMINAL</p> <p>60°</p> <p>1.151 (29.235)</p> <p>.826 (20.980)</p> <p>.362 (9.195) MIN PIN INSERTION</p> <p>.397 REF (10.084)</p> <p>1.270 (32.258)</p> <p>.459 (11.659) REF</p> <p>1.019 (25.883)</p> <p>.620 (15.748)</p> <p>1.342 (34.087)</p> <p>1.597 (40.564)</p>	<h3>3 Pin Plug-on 300 Series</h3>

All dimensions are for reference. (Contact Texas Instruments before finalizing Engineering drawings.)



3CR - YY - ZZ

Basic Part Number

Physical Configuration

Series	Leads/Terminal/Mounting
100 Series	Bracket
200 Series	2 Pin
300 Series	3 Pin

Variations on types of terminals & leads are specified by the last two digits.

Electrical Rating

Pick-up, drop out, and capacity are specified by these three digits. See pages 5 and 6 for full list.

How to Order

1. The Basic Klixon® part number is 3CR.
2. Physical Configuration - State requirements for special leads, terminals, and mounting.
3. Electrical Ratings - Ratings 101B-198B have up to 14 amp start current capacity; 201-298 has 15 amp capacity. Pickup and dropout are specified by the last two digits.

Electrical Rating

Klixon Rating No.	Relay Operating Characteristics (Amps)	
	Max. Pick-Up	Min. Drop-Out
101	2.34	1.92
102	2.39	1.96
103	2.42	2.00
104	2.48	2.05
105	2.52	2.09
106	2.62	2.18
107	2.73	2.27
108	2.79	2.31
109	2.84	2.36
110	2.88	2.40
111	3.05	2.53
112	3.14	2.56
113	3.25	2.70
114	3.40	2.80
115	3.50	2.90
116	3.68	3.05
117	3.80	3.15
118	3.90	3.20
119	4.00	3.30
120	4.10	3.40
121	4.20	3.50
122	4.30	3.55
123	4.40	3.66
124	4.55	3.75
125	4.70	3.90
126	4.86	4.05
127	5.00	4.15
128	5.10	4.20
129	5.20	4.30
130	5.30	4.40
131	5.45	4.50
132	5.60	4.65
133	5.70	4.75
134	5.80	4.80
135	5.90	4.90
136	6.00	4.95
137	6.10	5.00
138	6.20	5.10
139	6.30	5.25
140	6.40	5.30
141	6.50	5.40
142	6.65	5.50
143	6.80	5.65
145	7.00	5.90
147	7.15	6.00
148	7.30	6.10
150	7.60	6.40
151	7.90	6.60
152	8.10	6.75
154	8.25	6.90
155	8.45	7.05

Electrical Rating (cont.)

Klixon Rating No.	Relay Operating Characteristics (Amps)	
	Max. Pick-Up	Min. Drop-Out
156	8.60	7.15
157	8.80	7.30
158	9.00	7.50
159	9.20	7.65
160	9.45	7.90
162	9.80	8.10
163	10.16	8.40
165	10.40	8.60
166	10.80	9.00
167	11.00	9.30
168	11.70	9.70
169	12.20	10.20
170	12.70	10.56
171	12.90	10.80
172	13.30	11.10
173	13.90	11.50
174	14.10	11.90
175	14.50	12.10
176	14.90	12.50
177	15.20	12.80
178	15.80	13.30
179	16.80	13.90
180	17.10	14.20
181	17.90	15.10
182	18.40	15.40
183	19.60	16.40
184	20.90	17.40
185	22.10	18.40
186	22.50	18.70
187	23.30	19.40
188	24.00	19.80
189	24.75	20.45
190	25.80	21.50
191	27.20	22.70
192	28.80	23.90
193	30.30	25.10
197	21.80	17.90
198	24.40	20.35



AGENCY APPROVALS & CERTIFICATIONS



Agency	File Number
UL	SA3745 6/18/63
CSA	LR11372-27C Part P

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

Americas
508-236-2551
electrical-protection-sales@
sensata.com

Europe, Middle East & Africa
+31743578156
info-sse@list.sensata.com

Asia Pacific
sales.isasia@list.sensata.com

China +86 (21) 2306 1500
Japan +81 (45) 277 7117
Korea +82 (31) 601 2004
India +91 (80) 67920890
Rest of Asia
+886 (2) 27602006 ext 2808