


ECHELLE 1/1

Couple de serrage/Tightening torque :

Ecrou canon/Threaded Barrel :  
Recommande/Recommended : 4,0 +-0,25 N.m (5,0 N.m max)

Vis de connection/terminal screw :  
Recommande/Recommended : 1,6 +-0,1 N.m (2,0 N.m max)

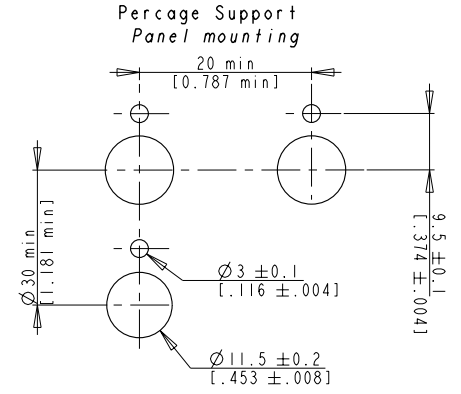

<b>C</b>	Ajout du "L" dans désignation de la norme (folio2) / Ajout n° DDM : DDM-19/01-00744	Modified by	M_VERDIER	22/01/2019
	Suppression des tirets dans les références produits	Verified by	D_MEUX	22/01/2019
	Suppression du 25A et 30A hors norme / Modif. ref. plan d'ensemble	Authorized by	F_SALA	22/01/2019
Toler. gene. Lin ±	0.2 mm	This document is the property of Crouzet-Automatismes. It's contents cannot be reproduced or divulged without the company's written approval. The product data and specifications found on this document do not constitute any contractual obligation. Crouzet-Automatismes and its subsidiaries reserve the right to modify the specifications. All rights of reproduction, modification, reprinting, and translation reserved for all countries.		
Toler. gene. Ang ±	3 degrees			
<b>CROUZET</b>	General Raw surface Ra ✓	Scale <b>3/2</b>		
2, rue du Dr ABEL BP 59, 26902, Valence CEDEX 9 France	Customer:	Customer Ref.:		PFT001:<C>;<M>
	Designation/FR: <b>DISJONCTEUR THERMIQUE UNIPOLAIRE PUSH PULL MS3320L LONG NECK</b>			
	Designation/GB: <b>SINGLE POLE THERMAL CIRCUIT BREAKER PUSH PULL MS3320L LONG NECK</b>	Department		<b>CT</b>
Request:	Design by F_VILLE 09/10/2017	<b>DATA SHEET</b>		
DDM-19/01-00744	Verif. by D_MEUX 09/10/2017			
NATO_code: FA0X2	Authorized by	<b>FT844001_001FR</b>		
		Index	Format	Folio
		<b>C</b>	<b>A3</b>	1/2

Caracteristiques suivant / Features according to : AS33201 and MS3320



- Masse / Weight : 20g max
- Tension d'utilisation / Operating voltage : 28VDC - 115VAC 360-900Hz
- Temperature d'utilisation / Operational temperature limits : - 55 °C - +121 °C
- Endurance electromecanique / Electromechanical endurance : 5000 cycles a vide + 2500 cycles en charge (resistif-inductif cosφ 0.7) / 5000 without a load + 2500 cycles loaded (resistive-inductive power factor 0.7)
- Vibration sinus / Sinusoidale vibration : 10 g-PK condition A suivant MIL STD-202 methode 204D / 10 g-PK condition A according to MIL STD-202 method 204D
- Vibration aléatoire / Random vibration : 5.35 Grms condition A suivant MIL STD-202 methode 214A / 5.35 Grms condition A according to MIL STD-202 method 214A
- Choc mecanique / Mechanical shock : 50 g 11msec 3 demi-sinusoidale 6 directions / 50 g 11msec 3 half-sine 6 directions
- Corrosion / Corrosion : 48 heures brouillard salin / Salt spray 48 hours
- Pouvoir de coupure / Breaking capacity : 2000A RMS @ 115V-400Hz \*voir note 1 / 6000A @ 28VDC \*see note 1
- Chute de tension / Voltage drop

- Seuils et temps de declenchement : / Thresholds and tripping time

Calibre rating	Temperature	Seuils declenchement non declenchement %In / Trip and no trip thresholds %In		Temps de declenchement en seconde / Tripping times in seconde		
		Declenchement Trip	Non declenchement Non trip	200 %In	500 %In	1000 %In
1A => 20A	- 55°C	160	115	35 max	2 max	0.4 max
1A => 20A	23 °C	138	115	1.5-40	0.15-3	0.035-0.8
1A => 20A	121 °C	138	100	1.5 min	0.2 min	0.04 min

Calibre Rating	Volts
1A	1.10V max
2A	0.5V max
2 1/2A	0.6V max
3A	0.35V max
4A	0.35V max
5A	0.25V max
7 1/2A	0.20V max
10A	0.20V max
15A	0.15V max
20A	0.15V max

-Tripping curve

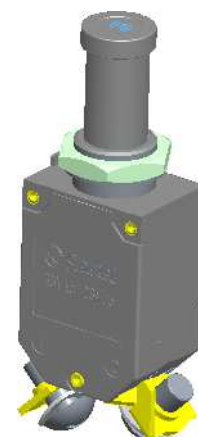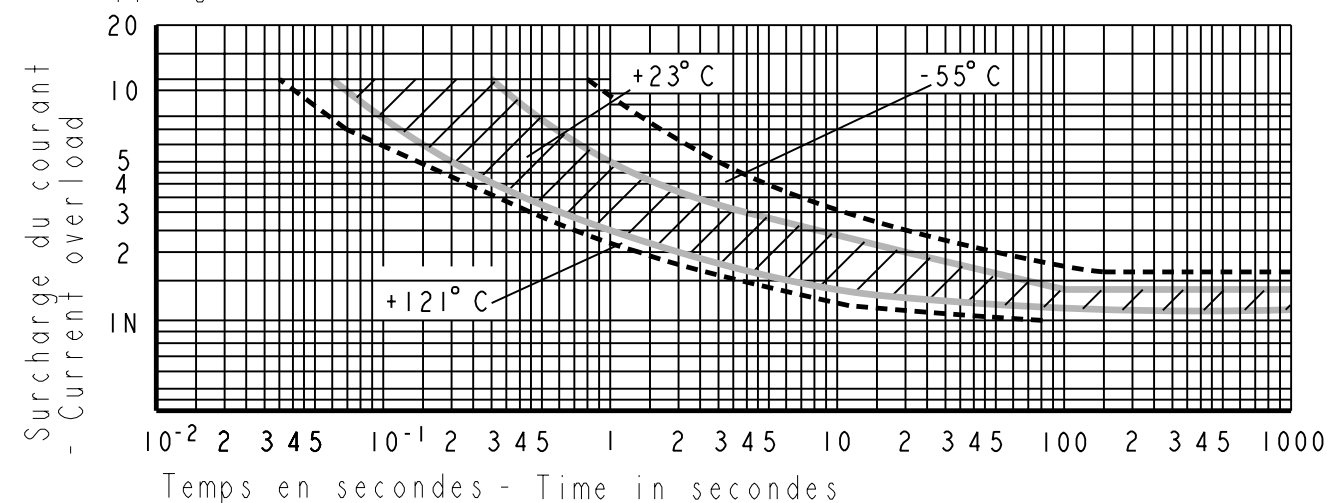

Documents associes / Associated documents	
Plan de marquage / Marking drawing	MA844001_001FR
Plan d'ensemble / Assembly drawing	SP994000

- Reference Produit / Product reference

Calibre Rating	Reference produit / Product reference
1A	84400148
2A	84400149
2.5A	84400150
3A	84400151
4A	84400161
5A	84400152
7.5A	84400153
10A	84400154
15A	84400155
20A	84400156

Marquage produit / Marking product :

- Reference -----> 84400151-3A
- Norme / Standard -----> MS3320-3L
- Amendement / Amendment -----> AMDt:A
- Date -----> YY-WW
- YY : Annee / Year ( 2 digits)
- WW : Semaine / Week (2 digits)

<b>C</b>	Ajout du "L" dans designation de la norme (folio2) / Ajout n° DDM : DDM-19/01-00744	Modified by	M_VERDIER	22/01/2019
	Suppression des tirets dans les références produits	Verified by	D_MEUX	22/01/2019
	Suppression du 25A et 30A hors norme / Modif. ref. plan d'ensemble	Authorized by	F_SALA	22/01/2019
Toler. gene. Lin ± 0.2 mm		This document is the property of Crouzet-Automatismes. It's contents cannot be reproduced or divulged without the company's written approval. The product data and specifications found on this document do not constitute any contractual obligation. Crouzet-Automatismes and its subsidiaries reserve the right to modify the specifications. All rights of reproduction, modification, reprinting, and translation reserved for all countries.		
Toler. gene. Ang ± 3 degrees				
<b>CROUZET</b>	General Raw surface Ra ✓	Scale 1/1		
2, rue du Dr ABEL BP 59, 26902, Valence CEDEX 9 France	Customer:	Customer Ref.:		
Request:	Designation/FR: <b>DISJONCTEUR THERMIQUE UNIPOLAIRE PUSH PULL MS3320L LONG NECK</b>	PFT001:<C>;<M>		
DDM-19/01-00744	Designation/GB: <b>SINGLE POLE THERMAL CIRCUIT BREAKER PUSH PULL MS3320L LONG NECK</b>	Department CT		
NATO code: FAOX2	Designed by F_VILLE 09/10/2017	<b>DATA SHEET</b>		
	Verified by D_MEUX 09/10/2017			
	Authorized by	<b>FT844001_001FR</b>		
		Index	Format	Folio
		<b>C</b>	<b>A3</b>	2/2